

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

REVISIONS				
SYM	ZONE	ECN, ERN NO.	DATE	APPRD.
A		PROPOSAL	Jan 17.07	L.CHAN
B		PROPOSAL	Jan 26.07	L.CHAN

**NOTES:**

**1. MATERIALS:**

**HOUSING:** GLASS REINFORCED HIGH TEMPERATURE THERMOPLASTIC  
FLAMMABILITY UL94V-0  
COLOUR: BLACK


**CONTACTS:** COPPER ALLOY.  
**PLATING:** 1.27 MICRONS [50 u"] MIN NICKEL UNDERPLATE OVERALL.  
0.76 MICRONS [30u"] PLATED ON MATING AREA.  
TIN ON CONTACT TAILS.

**SHELL:** STEEL , NICKEL PLATED.

**2. TOLERANCE UNLESS INDICATED OTHERWISE: ±0.30 [.012]. ±3°.**



AMPHENOL PART NUMBER: U E 3 2 - A N 0 - 0 0 0

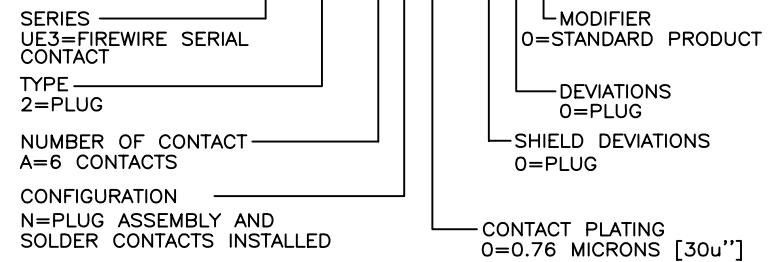

MATERIAL	DRAWN	MT.Chen	DATE	Jan 17.07	Amphenol Canada Corp.
	DESIGNED	L.CHAN	DATE	Jan 17.07	
SEE NOTES	CHECKED				TITLE IEEE 1394 FIREWIRE PLUG 6 POSITION SOLDER TYPE
	I. E. APPRD.				
	Q. A. APPRD.				
PLATING	DWG. APPRD.				DWG. DRAWING NO. C P-UE32-AN0-000
	ENG. REL. NO.				
SEE NOTES	REF.	EAR #13018	CODE ID. NO.	03554	REV. B
	DIMENSIONS ARE IN	mm			SCALE N/A WT. ----- SURF. ----- SHEET 1 of 1